



COATING LINE



Coating Head - mod. BS2/M



The **Coating Head mod. BS2/M** has been designed and built so that different coating techniques can be employed.

The following are some of the advantages the machine has to offer:


- Easy implementation: the coating head can be placed at the inlet of a common stenter
- Maximum control over compound quantity; process reproducibility is guaranteed
- Great flexibility in choosing compounds and textile supports, the variety of which is continuously growing
- Great accuracy in the tensioning of textile support passing through the machine.

The unit can be used both for air-coating, coating on cylinder, and coating by photoengraved cylinder; it is also equipped with a motorized device to adjust the coating thickness through digital displays.

The machine is also equipped with a rotary screen coating head. Such coating systems allow for maximum control over the compound penetration.

TECHNICAL DATA

| | |
|----------------|-------------------------|
| Useful width | to be defined |
| Power supply | 400 V/50 Hz/three-phase |
| Compressed air | 7±1 Kg/cm ² |

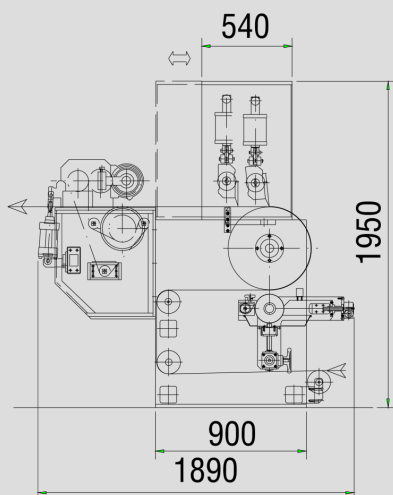

Member of CISQ Federation



CERTIFIED MANAGEMENT SYSTEM
ISO 9001 - ISO 14001



SUSTAINABLE MACHINERY CERTIFICATION

